


# NavLine BMW NBT/Champ2 Camera Module

For all bmw car with NBT/Champ2(6pins) idrive system Model : SE-1317A




NBT/Champ2 CAN-BUS wires:  
 Pin 9:yellow/brown CAN-L  
 Pin11:yellow/red CAN-H

## 2013 NBT/champ2

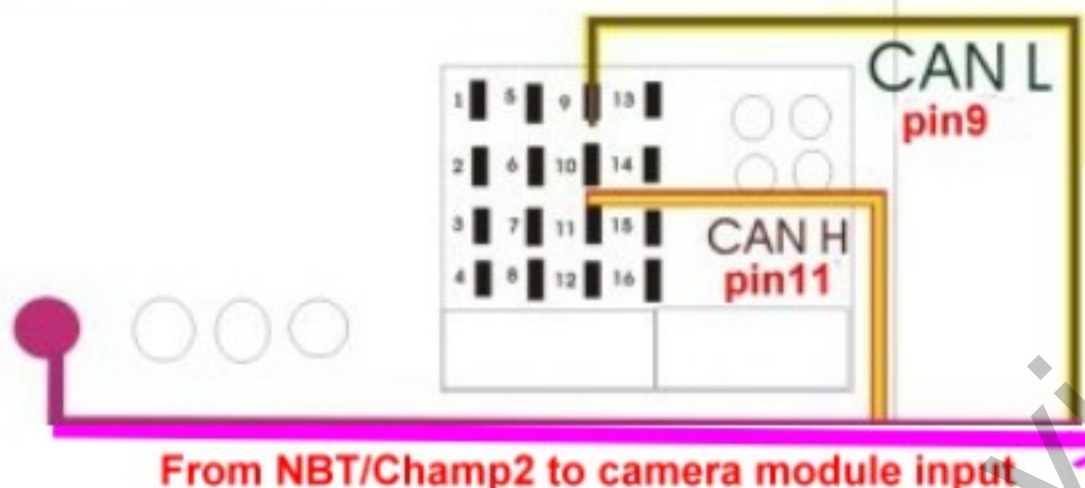

Used module LCD cable from module output to monitor

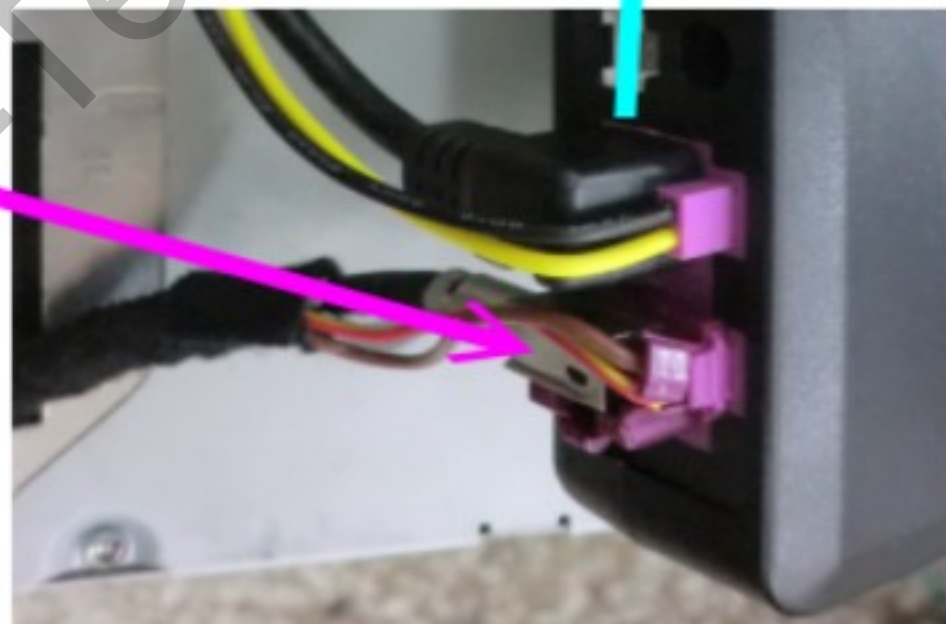

Output from module to screen

Empty

GND	Camera Video-In	GND	Camera Power Out
12V+	X	CAN-L IN	CAN-H IN
		CAN-L OUT	CAN-H OUT



Input from NBT/Champ2 to module

Input from NBT/Champ2 to module

TECHNOLOGY ELECTRONIC CO., LTD  
 No.9, Land 606,Anping Rd., Tainan City 70849 Taiwan  
 Tel: +886-62292246 Fax:+886-62288104  
 Website <http://www.sune-tech.com>  
 Shop <http://www.carnavi-tech.com>  
 Skype : hsin\_han99 or sune\_tech



**Down**

**UP**

- Dip1 8.8"-10.2" screen
- Dip2 Click "P" button to camera
- Dip3 Parking sensor 1
- Dip4 Open rear camera
- Dip8 with option DVD

- 6.5"-7" screen
- Auto change to camera
- Parking sensor 2
- close rear camera
- No dvd option