

Installation Manual

Q-ROI2 RGB Android Navigation

Model : QROI2-RGB

OCTA CORE



SUNE TECHNOLOGY CO.,LTD

No.9,Lane 606,Anping Rd,Tainan City 70849,TAIWAN

TEL:+88662292246 FAX:+88662288104

Http://www.sune-tech.com

Shop http://www.carnavi-tech.com

SKYPE:sune_tech or hsin_han99

• Specification

INDEX	CONTENS
OS	Android 5.1.1 (Lollipop)
CPU	Nexell S5P6818 (Cortex-A53 Octa-Core CPU up to 1.6GHz)
Memory	DDR3 2GB up to 800MHz
Internal Storage	8GB/16GB eMMC 5.1
Display	OEM LCD / RGB / HDMI / CVBS
Resolution	800 x 480
SD CARD	Micro SD Slot Support (up to 64GB)
GPS	UBLOX-8 (GPS + GLONASS)
USB	2.0 High speed x 5 (USB Host x4, OTG x1)
Touch	Resistive & Capacitive & UART Touch
Video Input	CVBS x 1
Map voice exclusive Speaker	3Watts/8ohm, 1 way mono
Audio Output	Stereo Output x 1 (for Car Audio)
Language	Multi-Language
Power	DC 9V ~ 18V
Operating Temperature	-10℃ ~ 70℃
Storage Temperature	-20℃ ~ 80℃

• Product Exterior



• Components

 <p>Power * 1ea (HPOWER0137)</p>	 <p>Multi * 1ea (HARETC0208)</p>	 <p>B/T board * 1ea (QCPASS0481)</p>	 <p>B/T Cable * 1ea (HARETC0209)</p>
 <p>R touch cable * 1ea HTOUCH0022</p>	 <p>RGB Out * 1ea (HRGBCA0025)</p>	 <p>GPS Antenna * 1ea (GPSANT0014)</p>	 <p>Microphone cable * 1ea (MICPHO0002)</p>
 <p>HDMI cable * 1ea (HARETC0067)</p>	 <p>USB cable * 1ea (HARETC0111)</p>	 <p>Speaker * 1ea (SPEAKER009)</p>	 <p>BUTTON * 1ea (HARETC0001)</p>
 <p>C touch board * 1ea (Option)</p>	 <p>C touch Cable * 1ea (HTOUCH0036) (Option)</p>	 <p>3G dongle * 1ea (ETCETC0155) (Option)</p>	 <p>WIFI dongle * 1ea(Option) (ETCETC0110)</p>  <p>Micro SD 8G * 1ea(Option) (PROSEL0020)</p>

• DIP SWITCH



※ ON : DOWN / OFF : UP



•High resolution monitor
with resistive touch panel



•Low resolution monitor
with resistive touch panel




•High resolution monitor
with Uart capacitive touch panel

•High resolution monitor
with SUNE capacitive touch panel




• High resolution monitor
with **SUNE W222 capacitive touch
panel**


• Installation

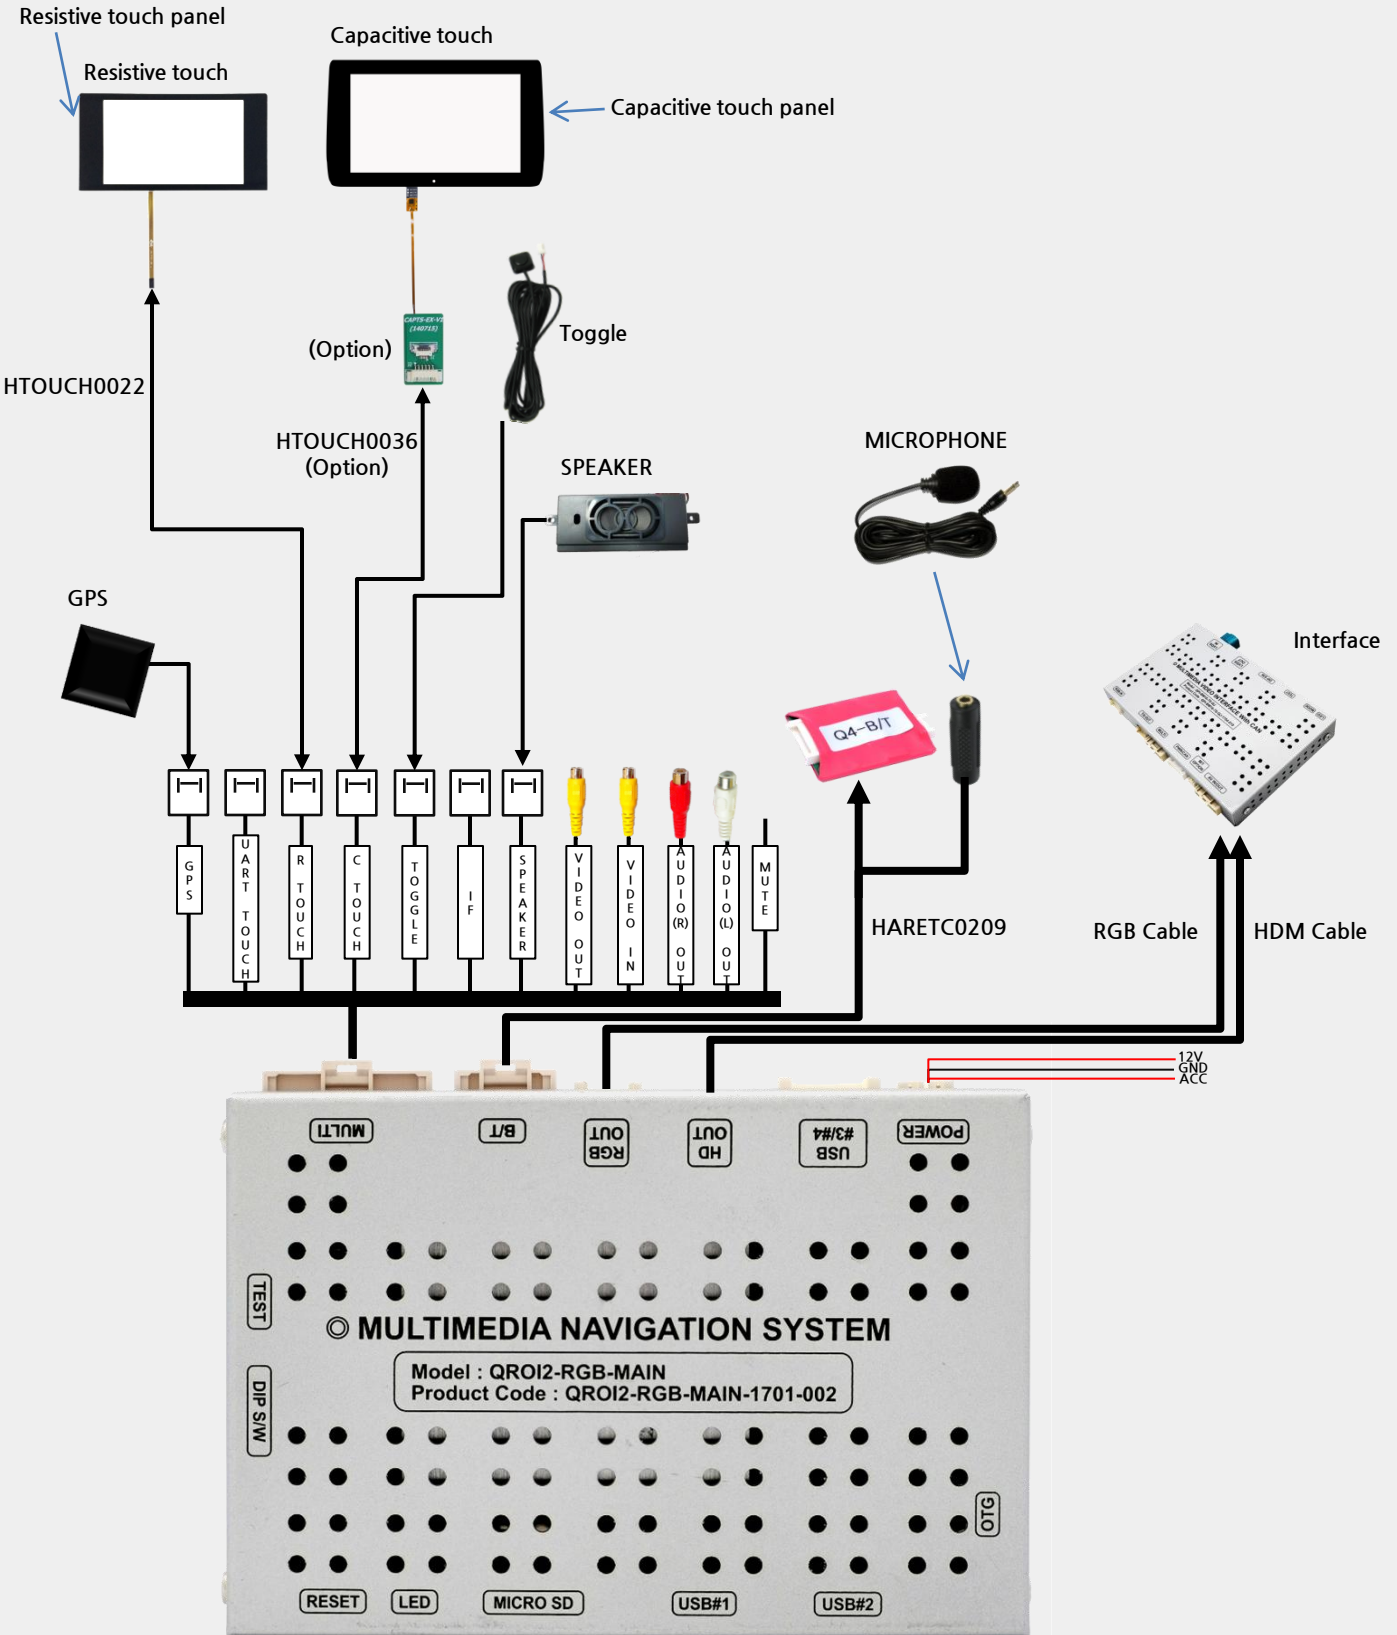

• Setting

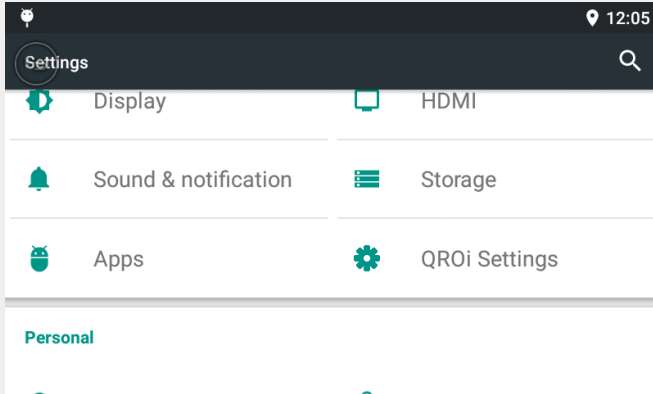

※ Directory : Setting→QROi Settings

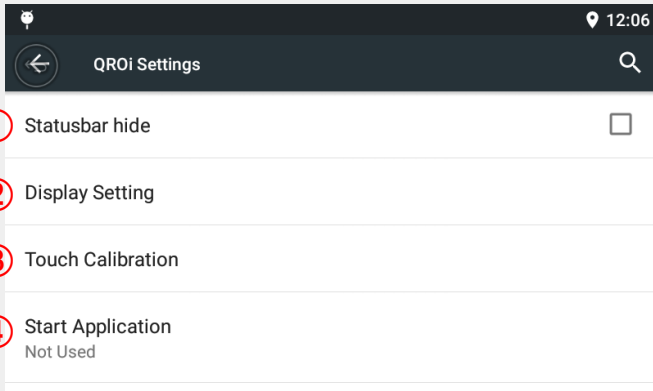


- ① Status bar hide :
Hide navigation bar located on the left
- ② Display Setting :
Adjust the screen
- ③ Touch Calibration :
Start touch calibration
- ④ Start Application :
Select startup application
When Qroi reboots



※ How to update the product

- Copy and paste “update file” to USB stick driver.
Once USB driver is inserted to USB port of Qroi,
the popup window will be created for the update.
Remove the USB driver after the completion.

• Time setting

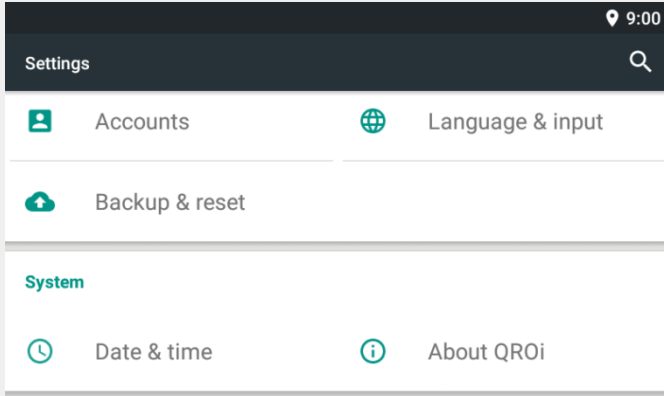

※ If the time is not matched,
1. Go to Settings→Date & time

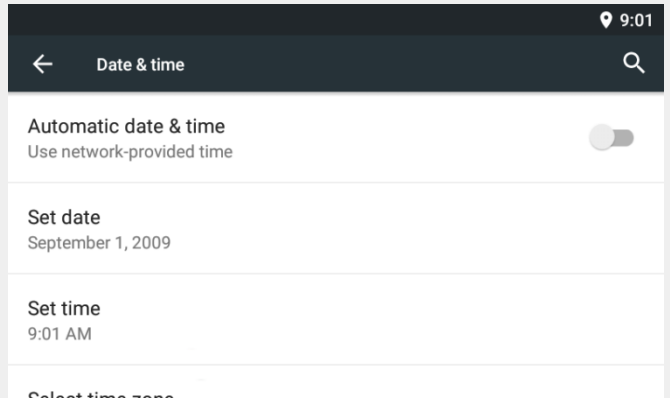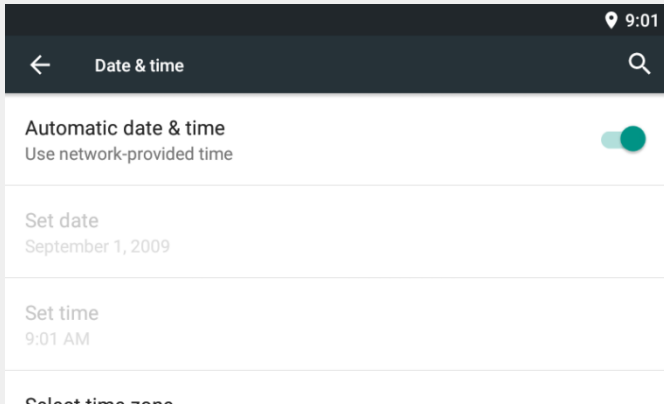

2. Automatic date & time
On→Off

3. Click “Select time zone”
to choose the location

